
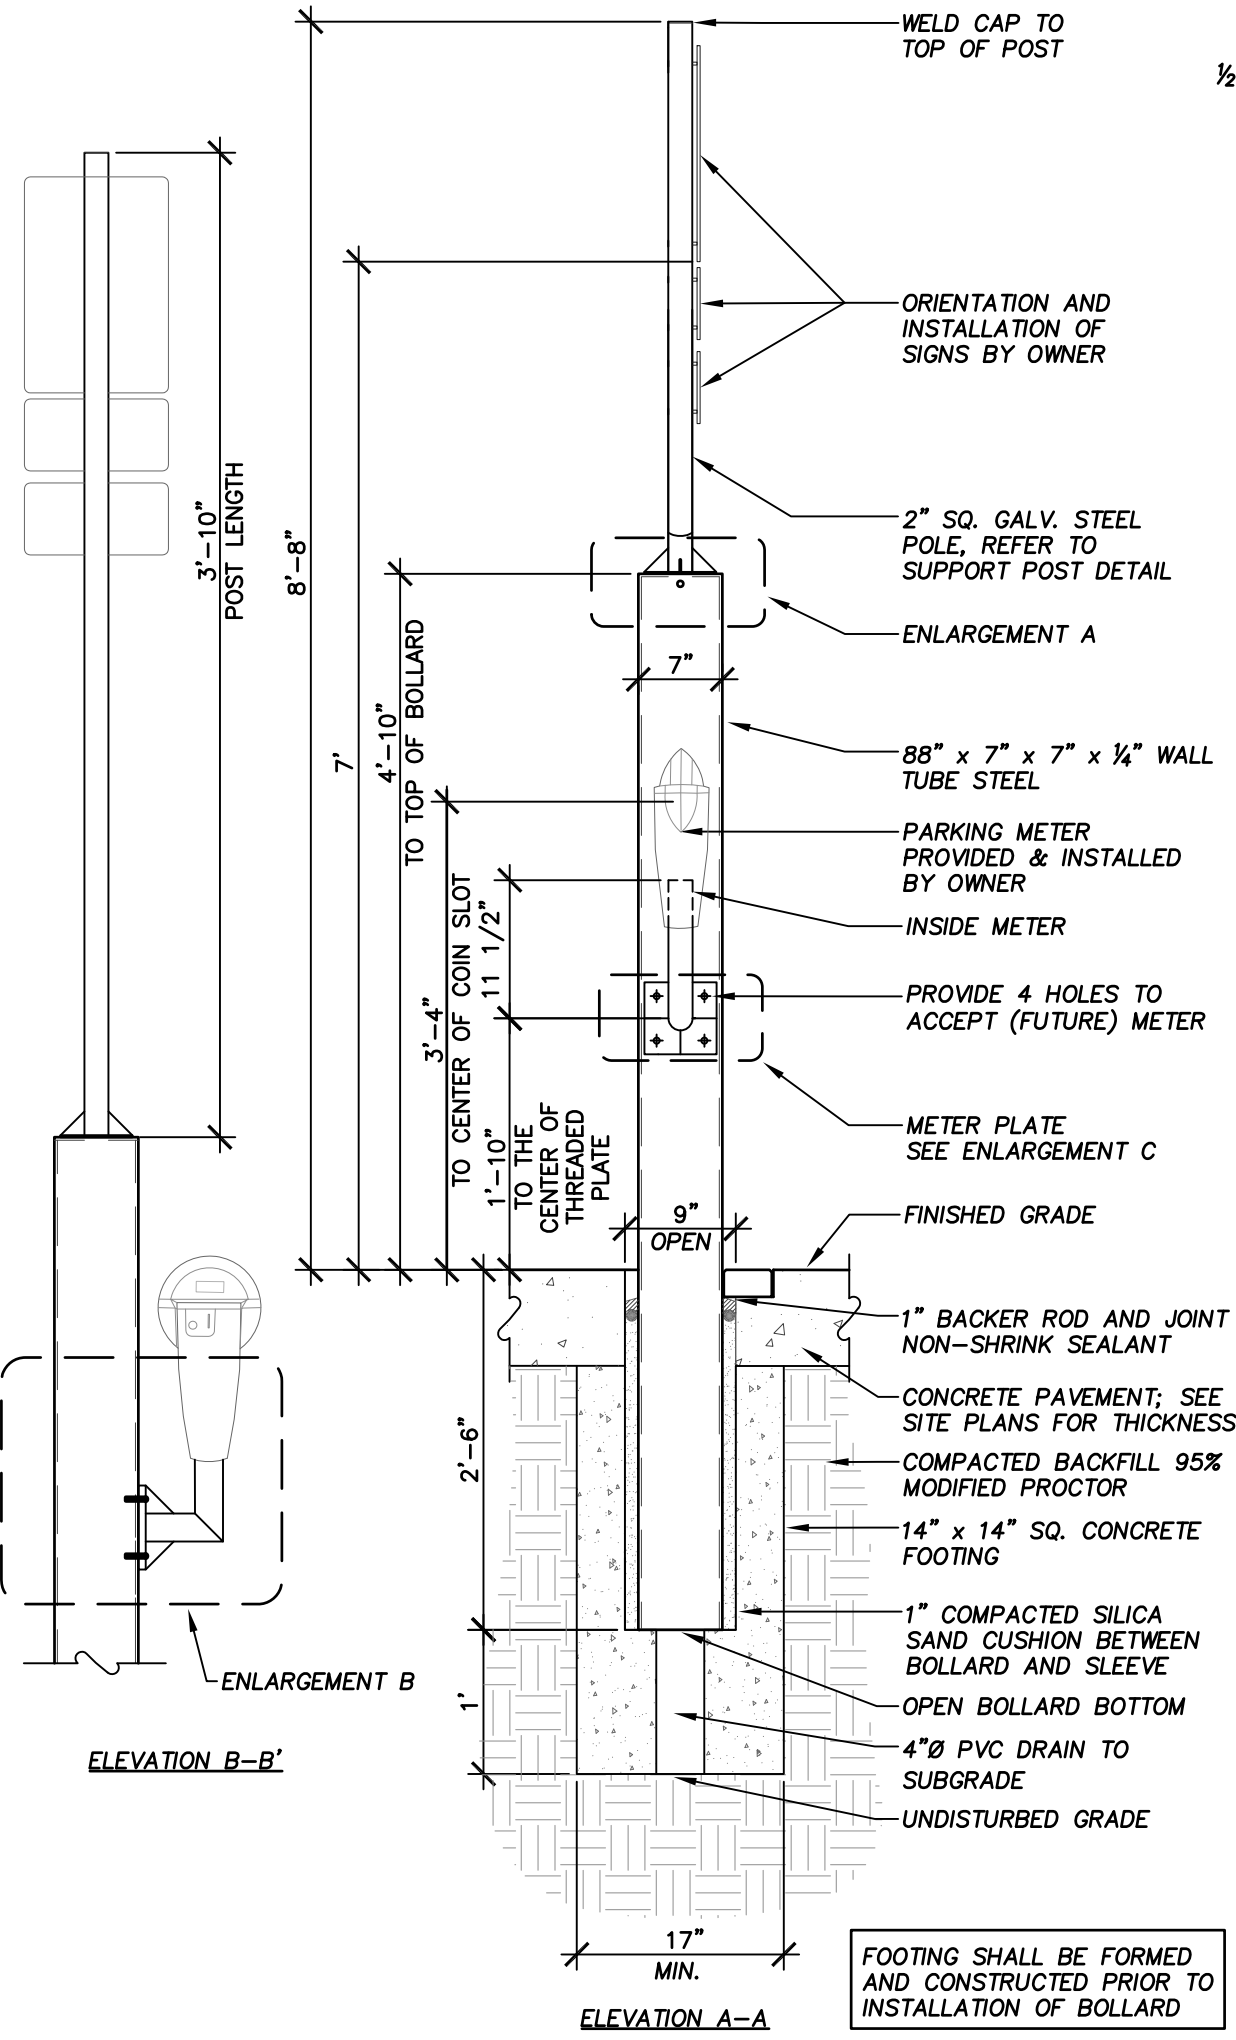
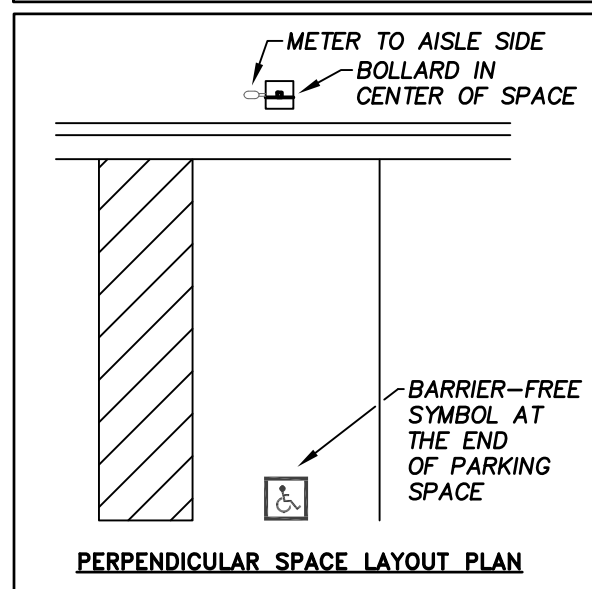


- NOTES:**
- FOR BARRIER-FREE PARKING BOLLARD WITHOUT METER OMIT MATERIALS ON ENLARGEMENT B-SIGN SUPPORT.
 - CONTINUOUS WELD ALL JOINTS.
 - FABRICATE BOTH (BOLLARD AND SIGN POST) METAL ASSEMBLIES PER SPECIFICATION PRIOR TO HOT DIP GALVANIZING THEM SEPARATELY.
 - SHOULD FIELD CUTTING OF METAL BE NEEDED, ALL CUT SURFACES SHALL BE THOROUGHLY COATED WITH Z.R.C. BRAND (800-831-3275) COLD GALVANIZE PRODUCT. (NOT REQUIRED IF FABRICATION AND ASSEMBLED PER PLAN. MUST BE APPROVED BY PROJECT REPRESENTATIVE IN ADVANCE)
 - INSTALL ENTIRE ASSEMBLY (BOTH BOLLARD AND SIGN POST) PLUMB, NOT NECESSARILY PERPENDICULAR TO THE PAVEMENT.
 - POSITION METER SO THAT COIN SLOT FACES AWAY FROM THE PARKING SPACE.
 - SEE PLANS BELOW FOR POST LOCATION.

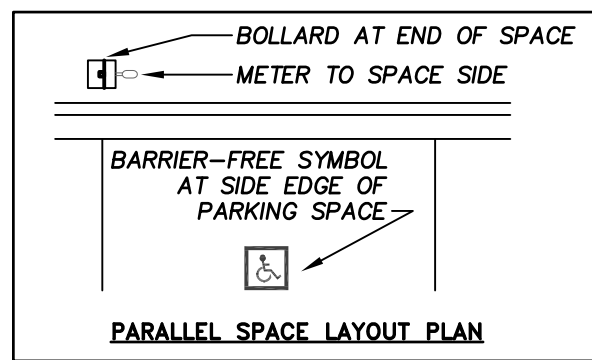

X BARRIER-FREE PARKING BOLLARD
 X-X SCALE: 3/4"=1'-0"

SEE SPECIFICATION SECTION
 324000 SITE APPURTENANCES
 033000 CAST-IN-PLACE CONCRETE

CS_STD_CIV_324000_BF_PARKING_BOLLARD_GALV.dwg